


Capped & Faced Fire Rated Door Leaf

FIRE-RATED DOORS



A 51mm metal capped and faced, insulated, rigid core, fire rated door to AS1530.4 2005 and BS476 PT22, 1987.

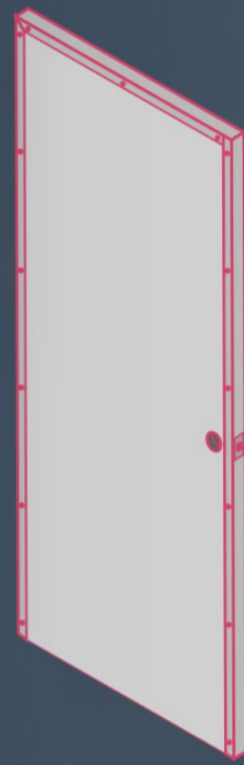

OVERVIEW

A 51mm metal capped and faced, insulated, rigid core, fire rated door to AS1530.4 2005 and BS476 PT22, 1987

SPECIFICATIONS

- 51mm (nominal) door leaf clad both sides with 1.0mm flat galvabond steel skins.
- External steel skins are bonded to a plywood faced fire door panel external steel capping, reinforcing to closer, lock and hinge positions.
- Lock hardware latch plate is recessed into the door edge so as to be flush (or near flush) with the external edge surface of the door leaf.
- Door leaf to be finished as specified.

WEIGHT



78kg for standard 2040 x 818 x 51mm leaf

SKIN THICKNESS


Standard 1.0mm

FINISH


Bare metal or polyester powdercoated

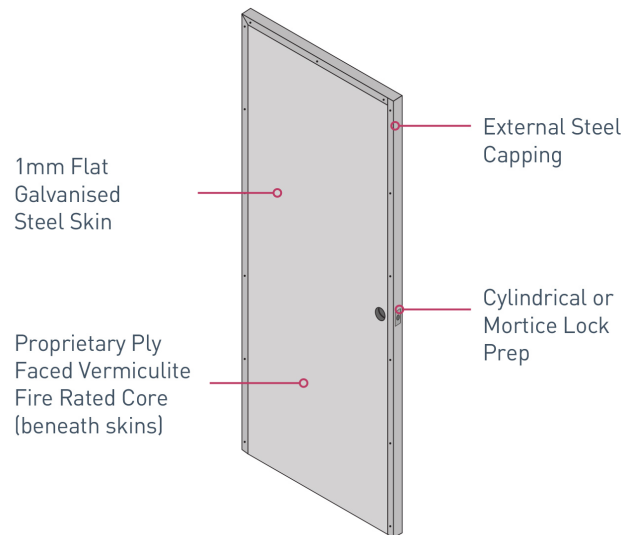

Top corner detail



Mortice Lock Preparation Recess in steel surface allows plate of mortice lock to flush fix



Cylindrical Lock Preparation Recess in steel surface allows latch plate to flush fit



Bottom corner detail