

Primaguard Door Leaf

INDUSTRIAL DOORS



A metal clad, 37, 42 or 55mm heavy duty door leaf.

ARA Manufacture's Primaguard door leaf is a heavy-duty door leaf with a foam core steel door and internal SHS framing.



OVERVIEW

This high security door can be tailored physically and aesthetically to suit most industrial or commercial building types whilst maintaining high levels of security.

Blast resistant up to 126 kPa, the Securaguard door set can be supplied in stainless steel, or with a galvanised, primed or powder-coated finish to the frame and leaf to suit almost any industrial and transportable building types.

The '126' single point locking, mid-range single leaf blast resistant door set is a 52mm thick, heavy duty, internal SHS framed, high density core blast door. The door set will provide up to 126 kPa blast protection (peak reflected overpressure lasting 100ms) when opening towards the direction of the blast.

With the option to be supplied with an electric or motorised locks to link in with your access control system, a motorised lock can also be linked with an opening / closing device and UPS to create a plug and play fully-automated door set.

APPLICATIONS

ARA Manufacture's Primaguard door leaves suit industrial exits requiring a heavy-duty door.

SPECIFICATIONS

Door leaf specifications


- Sizes: All leaves made to order. Typical door leaf sizes: 718mm, 818mm or 918mm wide x 2040mm high
- Thickness: 37mm
- Weight: 34kgs for standard 2040 x 818 x 37mm leaf
- Cladding: 0.6mm thick galvanised steel door skins both sides with the option to upgrade to up to 1.6mm
- Skin material: Galvanised or galvanneal as standard. Options include stainless steel, copper or brass
- **Skins:** Steel skins are folded at top and bottom of the leaf to completely enclose the ends and are sealed and riveted to prevent moisture ingress
- Lock: Hardware latch plate is recessed into the door edge to be flush (or near flush) with the external edge of the door leaf

FINISH

Bare metal or polyester powder-coated as standard. Options include primed, wet sprayed or a choice of embossed patterns.



INDUSTRIAL DOORS Primaguard Door Leaf

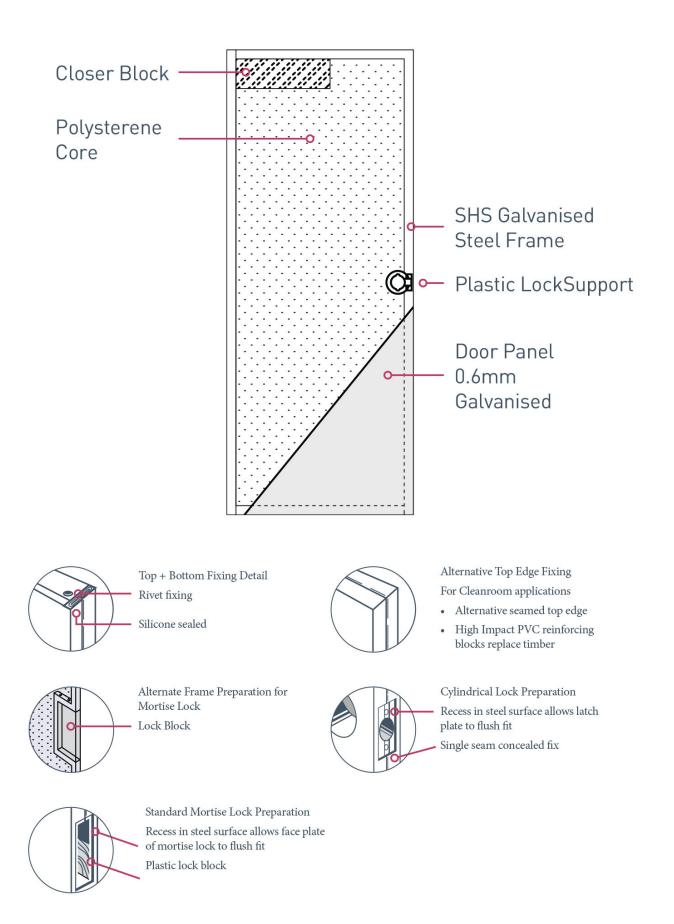



1300 306 440 admin@aramanufacture.com.au aramanufacture.com.au